




Hybrid System® DGBM*

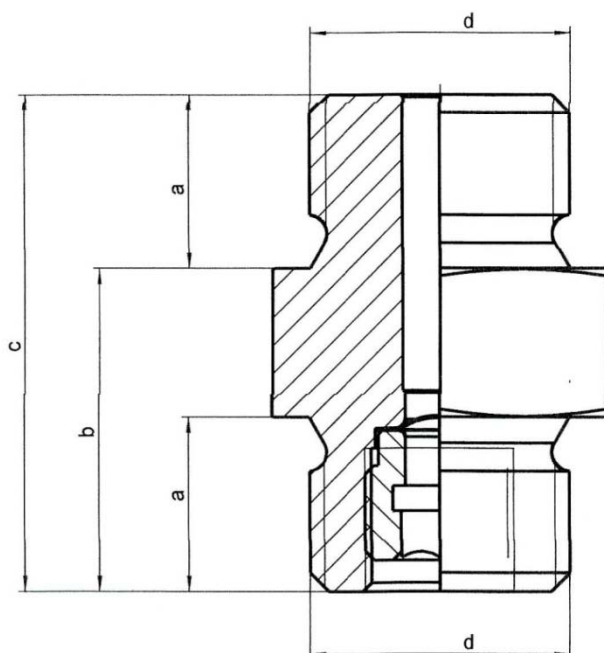

d	a	b	c	WS	DN	suitable for pressures
G 1/8"	8 mm	14 mm	22 mm	14	min. 2,0 mm	40 – 1000 bar
G 1/4"	12 mm	20 mm	32 mm	19	4,0 mm	30 – 1000 bar
G 3/8"	12 mm	20 mm	32 mm	22	5,5 mm	10 – 1000 bar
G 1/2"	14 mm	26 mm	40 mm	27	5,5 mm	10 – 1000 bar
G 3/4"	16 mm	28 mm	44 mm	32	12,7 mm	1 – 500 bar
G 1"	16 mm	26 mm	42 mm	40	12,7 mm	1 – 500 bar

Sealing with : O-ring, USIT-rings or metallic seals (Cu, Al)
Marking : by laser
Housing : stainless steel 1.4404

Bursting elements made of : nickel
stainless steel
inconel
(according to requirements and/or availability)

* DGBM (Legal protection of registered design / file reference 20308715.1)